


## PS-12750 12 Volt 75.0 AH

### Rechargeable Sealed Lead Acid Battery



We've Got The Power.™

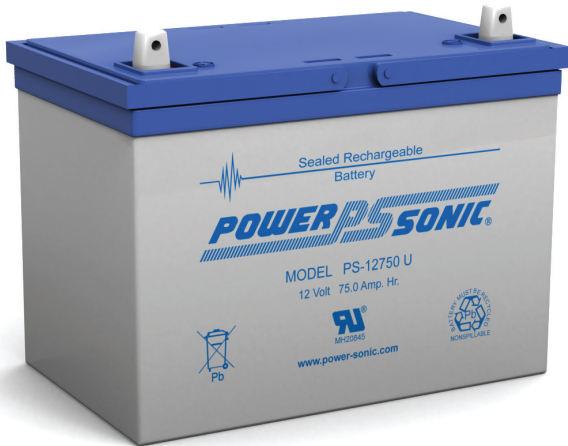


### Features

- Absorbent Glass Mat (AGM) technology for superior performance
- Valve regulated, spill proof construction allows safe operation in any position
- Power/volume ratio yielding unrivaled energy density
- Rugged impact resistant ABS case and cover (UL94-HB)
- Integrated ABS carrying handles for ease of movement
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- U.L. recognized under file number MH 20845


### Terminals

(mm)

- U: Universal terminals: Heavy-duty posts with 'nut & bolt' fasteners



### Physical Dimensions: in (mm)

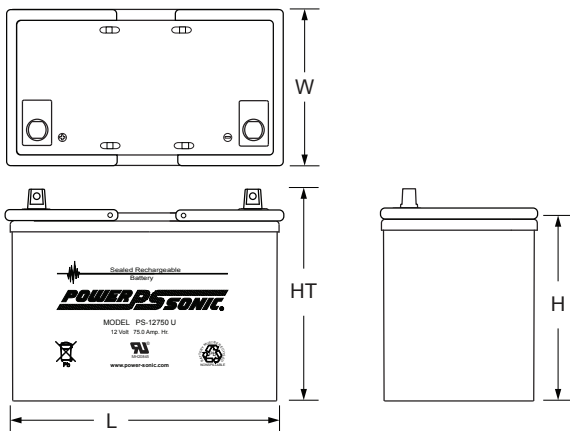

L: 10.25 (260) W: 6.60 (168) H: 8.15 (207) HT: 8.98 (228)

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.


### Performance Specifications

<b>Nominal Voltage</b> .....	12 volts (6 cells)
<b>Nominal Capacity</b>	
20-hr. (3.75A to 10.50 volts) .....	75.0 AH
10-hr. (7.2A to 10.50 volts) .....	72.0 AH
5-hr. (13.6A to 10.20 volts) .....	68.0 AH
1-hr. (47A to 9.00 volts) .....	47.0 AH
15-min. (160A to 9.00 volts) .....	40.0 AH
<b>Approximate Weight</b> .....	50.60 lbs. (22.95 kg)
<b>Energy Density</b> (20-hr. rate) .....	1.63 W-h/in <sup>3</sup> (99.61 W-h/l)
<b>Specific Energy</b> (20-hr. rate) .....	17.79 W-h/lb (39.21 W-h/kg)
<b>Internal Resistance</b> (approx.) .....	6 milliohms
<b>Max Discharge Current</b> (7 Min.) .....	225.0 amperes
<b>Max Short-Duration Discharge Current</b> (10 Sec.) .....	560.0 amperes
<b>Shelf Life</b> (% of nominal capacity at 68°F (20°C))	
1 Month .....	97%
3 Months .....	91%
6 Months .....	83%
<b>Operating Temperature Range</b>	
Charge .....	-4°F (-20°C) to 122°F (50°C)
Discharge .....	-40°F (-40°C) to 140°F (60°C)
<b>Case</b> .....	ABS Plastic
<b>Power-Sonic Chargers</b> .....	PSC-1210000A-C


**Constant Power Discharge Ratings**

MODEL	FINAL VOLTAGE	WATTS PER CELL @ 25° C						
		5 MIN	10 MIN	15 MIN	20 MIN	30 MIN	45 MIN	60 MIN
<b>PS-12750</b>	1.75	480	339	270	220	168	126	102
	1.70	509	356	278	231	171	128	103
	1.67	518	360	282	233	173	130	106

**Discharge Time vs. Discharge Current**

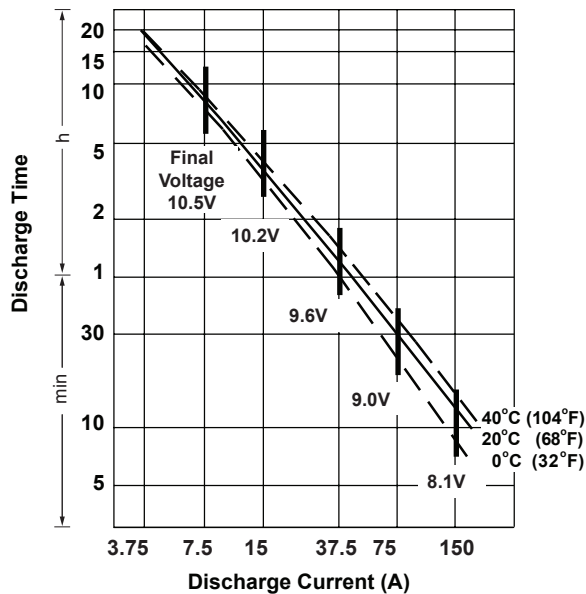

**Discharge Characteristics**

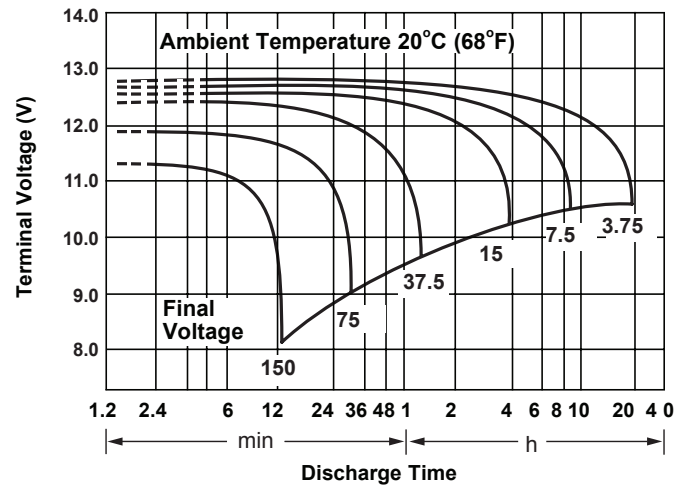


**Charging**

**Cycle Applications:** Limit initial current to 22.5A. Charge until battery voltage (under charge) reaches 14.4 to 14.7 volts at 68°F (20°C). Hold at 14.4 to 14.7 volts until current drops to under 750mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to “float” voltage.

**“Float” or “Stand-By” Service:** Hold battery across constant voltage source of 13.5 to 13.8 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

**Note:** Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

**Shelf Life & Storage**

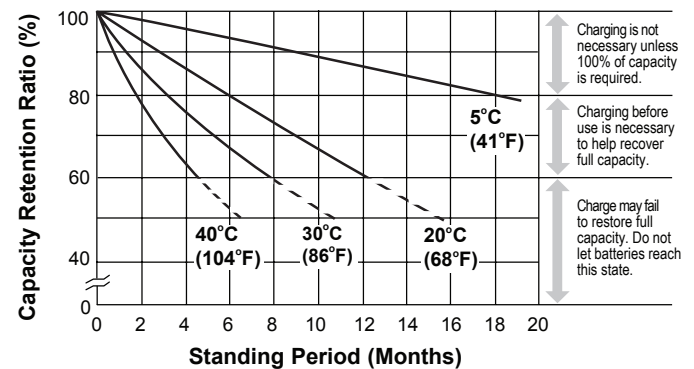

**Chargers**

Power-Sonic offers a wide range of chargers suitable for batteries up to 100AH. Please refer to the Charger Selection Guide in our specification sheets for “C-Series Switch Mode Chargers” and “Transformer Type A and F Series”. Please contact our Technical department for advice if you have difficulty in locating suitable models.

**Further Information**

Please refer to our website [www.power-sonic.com](http://www.power-sonic.com) for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc..

**Contact Information**

[www.power-sonic.com](http://www.power-sonic.com)

**DOMESTIC SALES**

Tel: +1-619-661-2020  
 Fax: +1-619-661-3650  
[national-sales@power-sonic.com](mailto:national-sales@power-sonic.com)

**CUSTOMER SERVICE**

Tel: +1-619-661-2030  
 Fax: +1-619-661-3648  
[customer-service@power-sonic.com](mailto:customer-service@power-sonic.com)

**TECHNICAL SUPPORT**

Tel: +1-619-661-2020  
 Fax: +1-619-661-3648  
[support@power-sonic.com](mailto:support@power-sonic.com)

**INTERNATIONAL SALES**

Tel: +1-650-364-5001  
 Fax: +1-650-366-3662  
[international-sales@power-sonic.com](mailto:international-sales@power-sonic.com)